


BASE OIL FOR LTSOBM

OIL BASED MUD ADDITIVE

INOBM 4000 – PRODUCT DATA SHEET

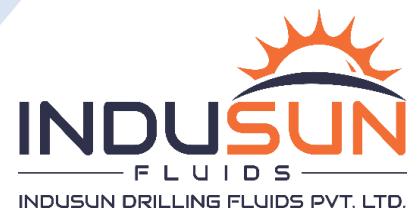

Specifications

| S.No. | Parameter | Specification |
|-------|---|---------------|
| 1 | Specific Gravity at 24°C (as per D-1298) | 0.77 – 0.82 |
| 2 | Kinematic Viscosity at 40°C (as per D-445), Cst. | 3.0 (Maximum) |
| 3 | Initial Boiling Point (IBP) (as per D-86), °C | 185 (Minimum) |
| 4 | Flash Point (as per D-93), °C | 85 (Minimum) |
| 5 | Aniline Point (as per D-611), °C | 76 (Minimum) |
| 6 | Pour Point (as per D-97), °C | 0 (Maximum) |
| 7 | Aromatic Content (as per D-1319), percent | < 1 |
| 8 | Fluorescence (By Fluoroscope) | Nil |

Packaging

55 Gal. drum/208 Litre barrels. Customized packaging is available on request.

© Indusun Fluids 2020

This product data sheet is produced only for informational purposes and under no circumstances can be treated as a guarantee or warranty furnished by Indusun Fluids.