


WETTING AGENT – INOBM 5000

OIL BASED MUD ADDITIVE

PRODUCT DATA SHEET

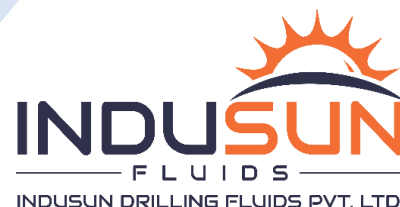

Description

INOBM 5000 is blend of modified treated vegetable oil and is used as a wetting agent.

Application

INOBM 5000 is used from 1 to 10 lbs./bbl. depending on mud weight, oil water ratio, and rate of penetration.

It requires lime for activating; Avoid excess concentration of INOBM 5000.

Safety

INOBM 5000 has to be handled as an industrial chemical, wearing protective equipment.

Specifications

S.No.	Parameter	Specification
1	Colour	Dark Brown
2	Physical state	Liquid
3	Flash Point	> 80 C
4	Specific Gravity @ 25 C	0.95 - 0.96

Advantages

- Can be used as a wetting agent for all types of oil based mud system
- Absorbs on to mineral surfaces, reducing interfacial surface energy and rendering Barites and other weighing material and all types of solids
- Ideal surfactant for low colloid, relaxed invert oil mud system

Packaging

55 Gal. drum/208 Litre barrels. Customized packaging is available on request.

© Indusun Fluids 2020

This product data sheet is produced only for informational purposes and under no circumstances can be treated as a guarantee or warrantee furnished by Indusun Fluids.